


Experience luxury with the vertical hydraulic platform, a versatile lift for a wide range of applications.

The vertical hydraulic platform is driven by proven and reliable hydraulic technology. Available in a wide range of sizes and configurations, the vertical hydraulic platform is a highly adaptable lift that can be used in a wide range of public and private environments, indoors and outdoors. It is available with its own metallic shaft or can be installed in a masonry shaft.

An vertical hydraulic platform lift can be anything from a simple platform with a console wall and false ceiling to a fully enclosed cabin with sliding doors. Choose from

a wide range of door options, wall finishings, ceilings and floors to create the perfect lift for your home or business.

Experience luxury with the vertical hydraulic platform

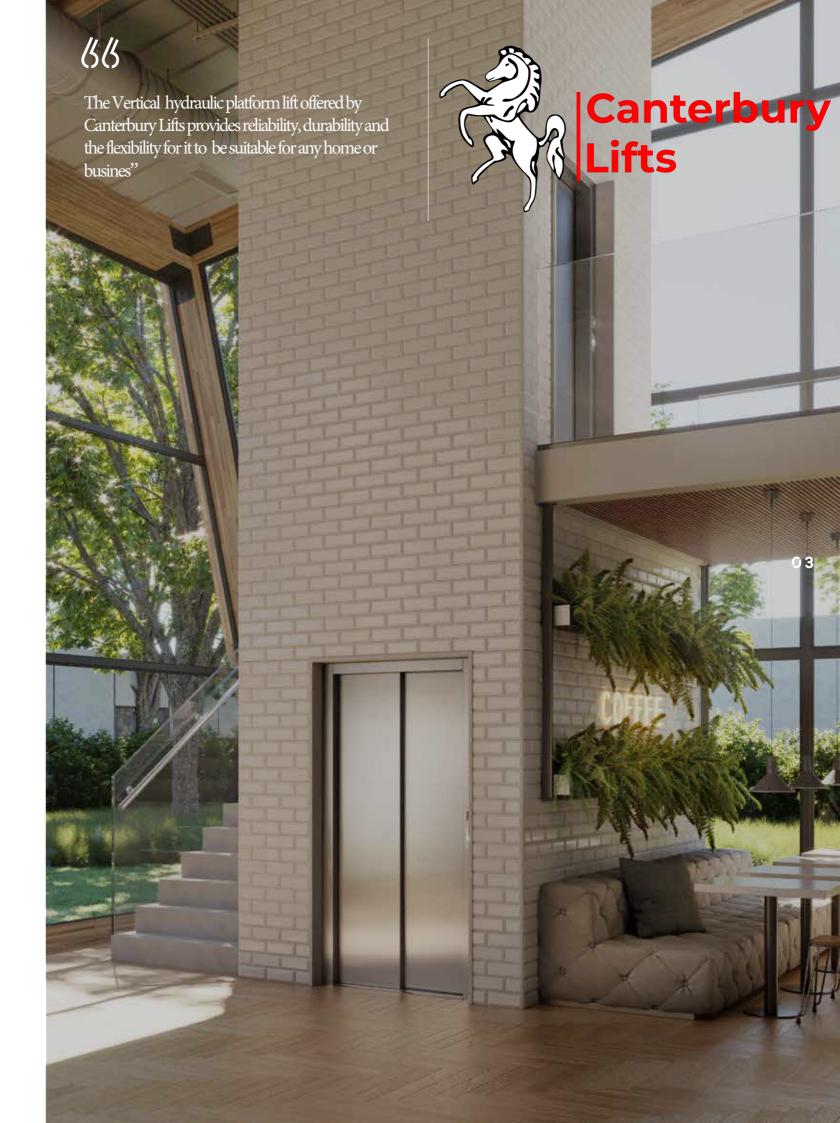



vertical hydraulic platform lifts are fully compliant with all relevant European safety standards and are suitable for use in private or public buildings.



## SMOOTH FROM START TO FINISH

All lifts are fitted with a soft start and stop device as standard, guaranteeing you an exceptionally smooth ride from the moment you press the floor button on the control panel. For your safety, cabins with open sides are fitted with a hold-torun control button that must be kept permanently pressed during the ride, whilst the fully enclosed cabin

has one-touch controls.



# DESIGN YOUR LIFT

Choose from the wide selection of cabin finishes to create a lift that suits your needs and matches your surroundings. The minimalist Simplicity range offers discreet coordination with its environment and is a good choice with public buildings, whilst the elegance of the Deluxe range will suit any stylish interior.





### EASY TO INSTALL

The vertical hydraulic platform lift is designed to be installed in just a few days, and when installed in its own shaft, requires minimal construction work. It is offered with eight standard plan sizes or can be custom-made to your required dimensions.

The lift runs on standard mains electricity. All lifts offered by Canterbury Lifts are fully compliant with all applicable safety standards.







05

3





Your Safety and Comfort

All Platinum lifts are fitted with a soft start and stop device, guaranteeing you an exceptionally smooth ride every time. The edges of open-sided cabins are fitted with photocells that will immediately stop the lift if any obstruction extends beyond the edge of the platform, keeping passengers safe at all times.

The lift is protected by a back-up battery power supply. A battery guard continuously monitors the charge level to ensure that there is always enough power in the batteries to run the lift in case of a power-cut.



Control Panel

1

The sleek backlit control panel is available in a choice of finishes and has a crystal clear digital display for the floor indicators.

Floor indicator displays for the landings are available as an option. The display panels give information about the status of the lift, and they show diagnostic codes for easy service and maintenance.

The Platinum is suitable for installation in public buildings and can be configured to meet the most stringent requirements for accessibility. The self-contained system is simple to install and can be fitted into small spaces in new or existing buildings. Multiple doors per floor are

possible

and all lifts have a

handrail and braille buttons as standard.


2


Designed to Fit

For security in public buildings, the lift can be secured with a selection of locking options.



THE BACKLIT
CONTROL PANEL
LOOKS STUNNING
AND IS EASY TO
USE

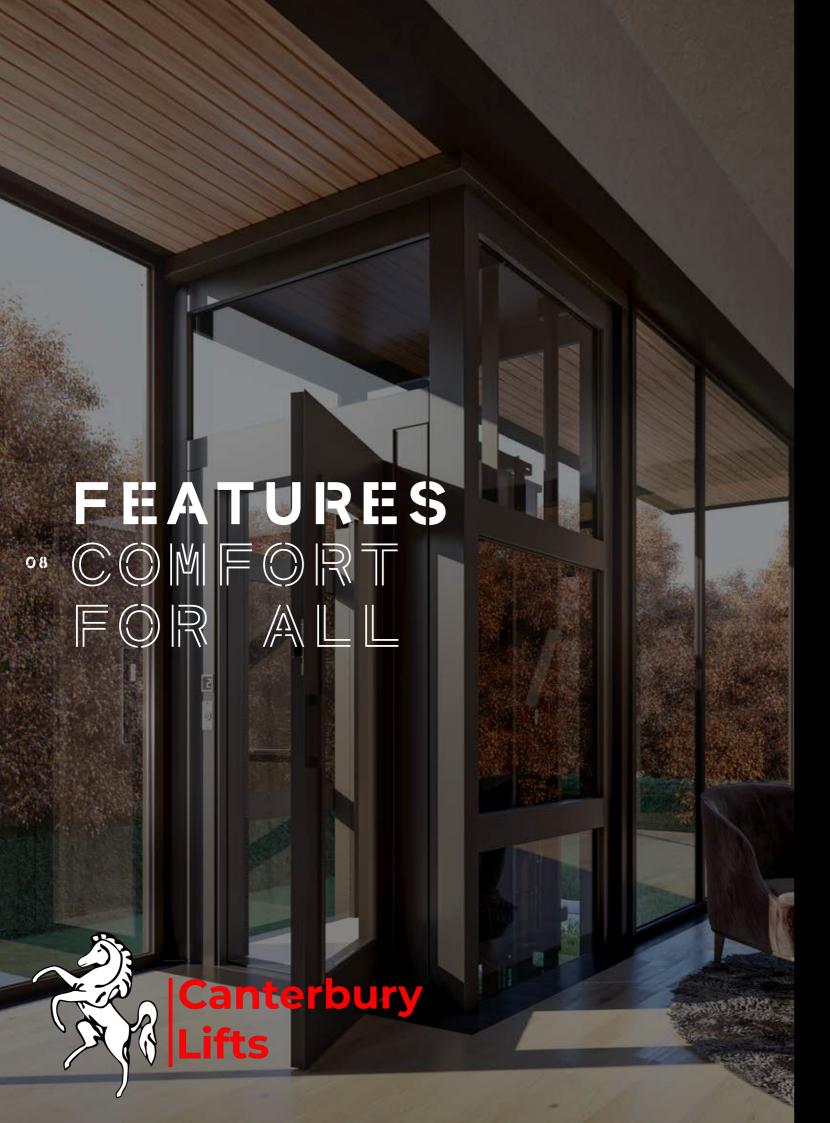

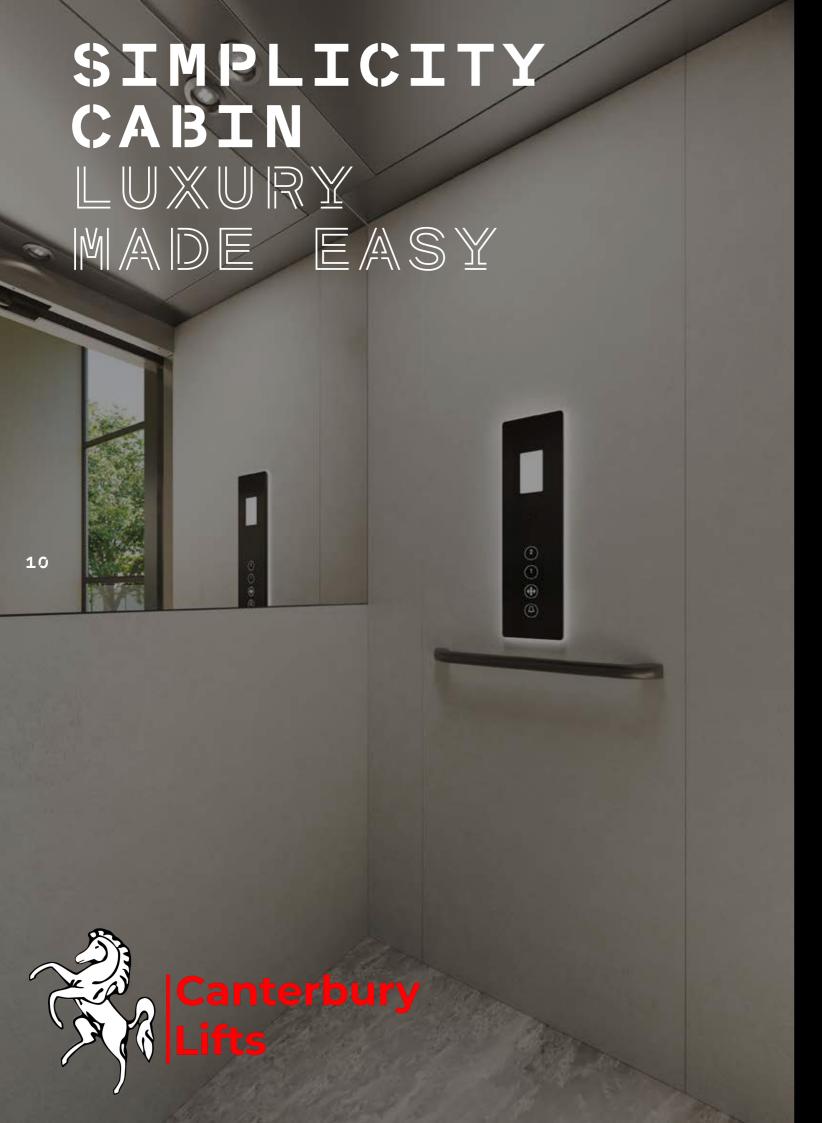


# SIMPLICITY: STYLE OPTIONS


Walls	Coloured film finish (skinplate), stainless steel or painted in choice of colour
Floor	Safety vinyl in choice of three colours
Mirror	Half-wall
Panoramic Wall	Half or full-wall, in transparent glass
Lighting	Three LED spotlights
Styling	-
Accents	-
Control Panel	Black
Handrail	Black or stainless steel

The Simplicity Cabin has a clean and streamlined look that blends discreetly into your surroundings.


# SIMPLICITY CABIN: WALLS

Solid Colour Finish (RAL colour reference is our recommended paint match)













White

Sand



A4 Milk (RAL 9010)





G1 Cream (RAL 1015)

12

N1 Grey (RAL 7035)

PPS Metal-Like (RAL 7037)

Painted in your colour of choice

Patterned Skinplates Steel panel coated with lightly patterned smooth finish plastic skin








PPS10 Frost (RAL 9003)

PPS11 Pearl (RAL 1013)

PPS1 Silver (RAL 7035)

#### Stainless Steel








**FLOORING** 


The hydraulic vertical platform lift has a choice of 3 vinyl floor coverings, with lifetime non-slip guarantee. The lift can also be supplied without flooring if you want to fit your own.







13

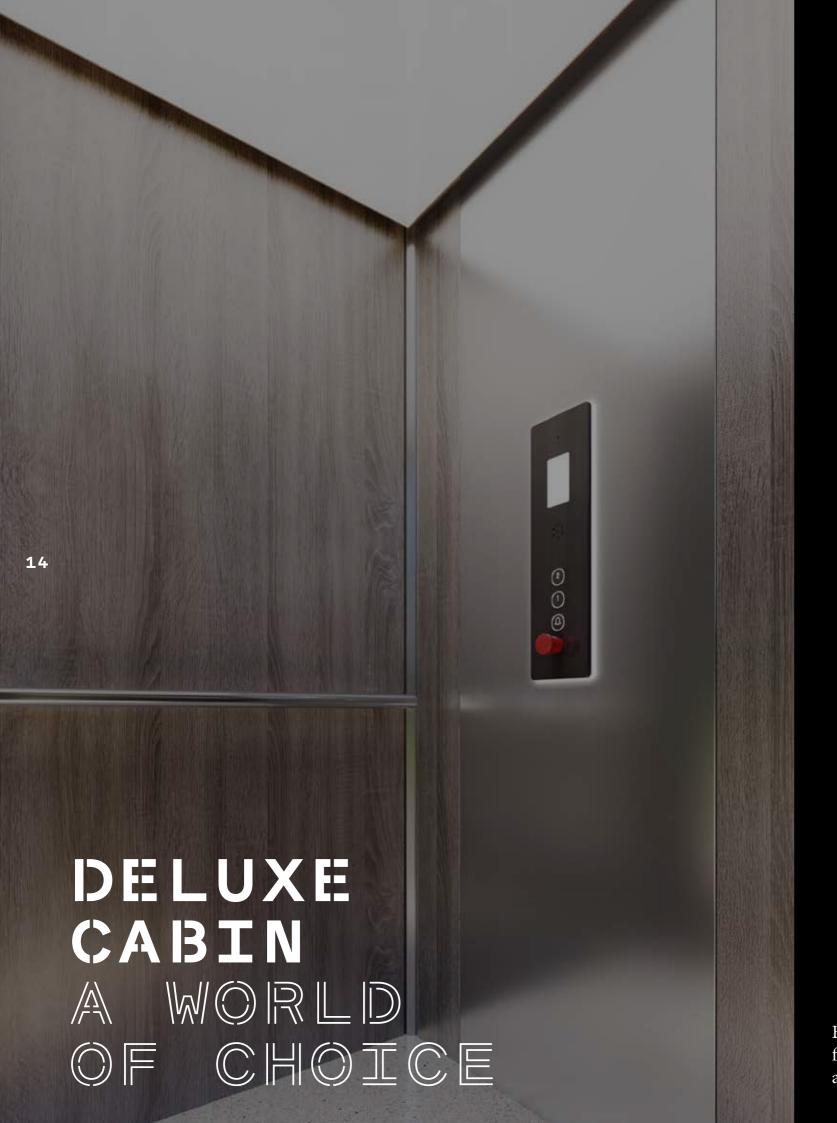

# DELUXE CABIN: A WORLD OF CHOICE

Walls	Choice of high pressure laminates in different texture effects
Floor	Stone, carpet or vinyl flooring in choice of colours
Mirror	Slim vertical, half- wall or full-wall
Panoramic Wall	Half or full-wall, in transparent glass
Lighting	Choice of LED lighting configurations
Styling	Choose a cabin style from the Diamond Collection or design your own
Accents	Contrasting corner and central panel accents
Control Panel	Black, mirrored steel or gold
Handrail	Stainless steel or gold


Express your style with the elegant finishes and contrasting colour accents in the Deluxe Cabin range



9003 White



1019 Beige Stainless Steel Finish



3003 Red



7012 Dark Grey



7021 Grey-Black



5024 Pale Blue

Black





Satin



Mirror



6011 Green

Gold Effect

# **FLOORING** Granite



White



Carpet





Sand

Grey

Grey



**WALLS** 

High-pressure laminate or stainless steel panels Wood Effect Laminate



4303 - Dark Wood



4367 Bright Wood



4515 Bright Wood



4511 Warm Wood



4533 Bright Wood

**Textured Effect Laminate** 





Linen - TX 3318



Woodgrain - TX 4485

#### Stone Effect Laminate



Concrete 1 - CR 3331 Stainless Steel



Concrete 2 - CR 546




Limestone - CR 868



17


Marble - CR 585



Mirror



16

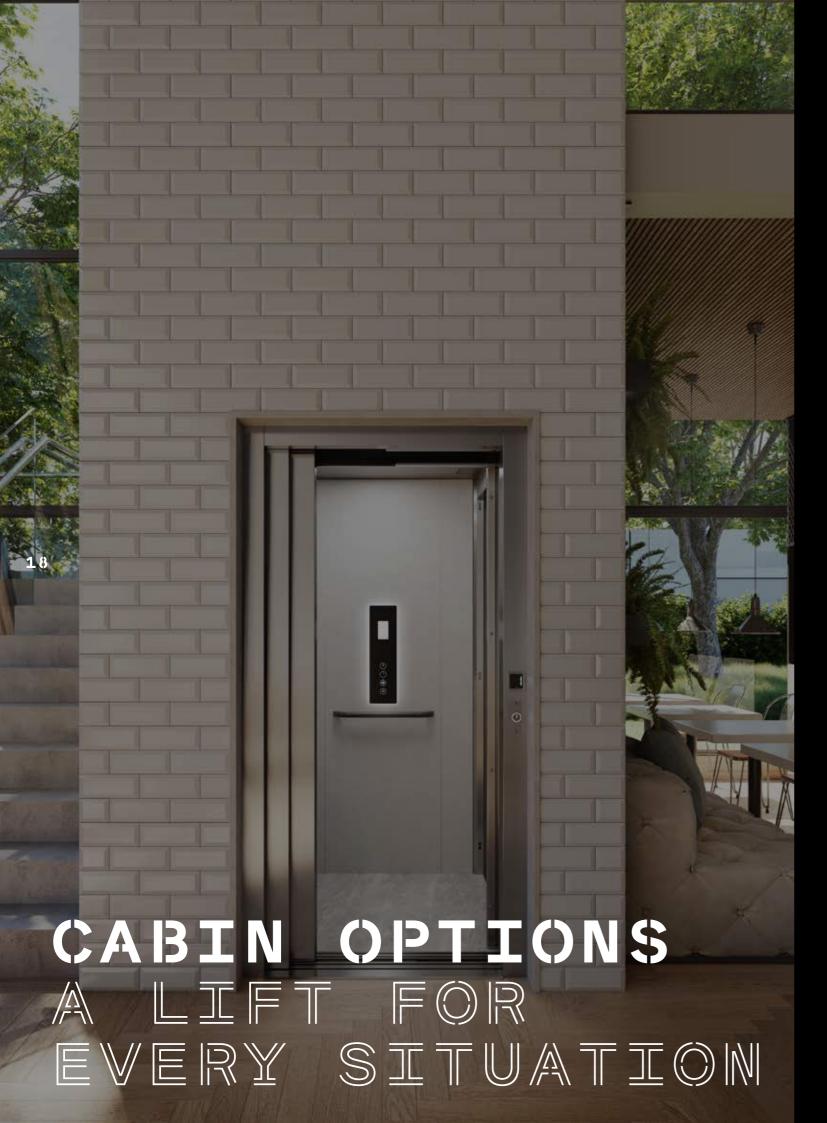

The Vertical hydraulic platform lift is available in a range of cabin configurations. Choose from open sided cabins with one, two or three walls or a fully enclosed cabin.

Cabins with open sides are fitted with hold-to-run controls whereas fully enclosed cabins have one-touch controls like a traditional elevator.







Mirror: Slim Vertical



Mirror: Half Wall



Mirror: Full Wall

# **DOORS**



The hydraulic vertical platform lift has the option of fully automatic sliding doors on the cabin and landings, giving all the comfort and convenience of a traditional elevator.

#### Open cabins

The landing accesses are fitted with swing doors.


#### **Enclosed cabins**

The fully enclosed cabin is offered with two different door configurations:

- + Automatic sliding doors on cabin and landings.
- + Automatic folding doors on the cabin and swing doors on the landings.

All doors can be painted in a choice of colour, and are available with optional glass panels. ask for full details.



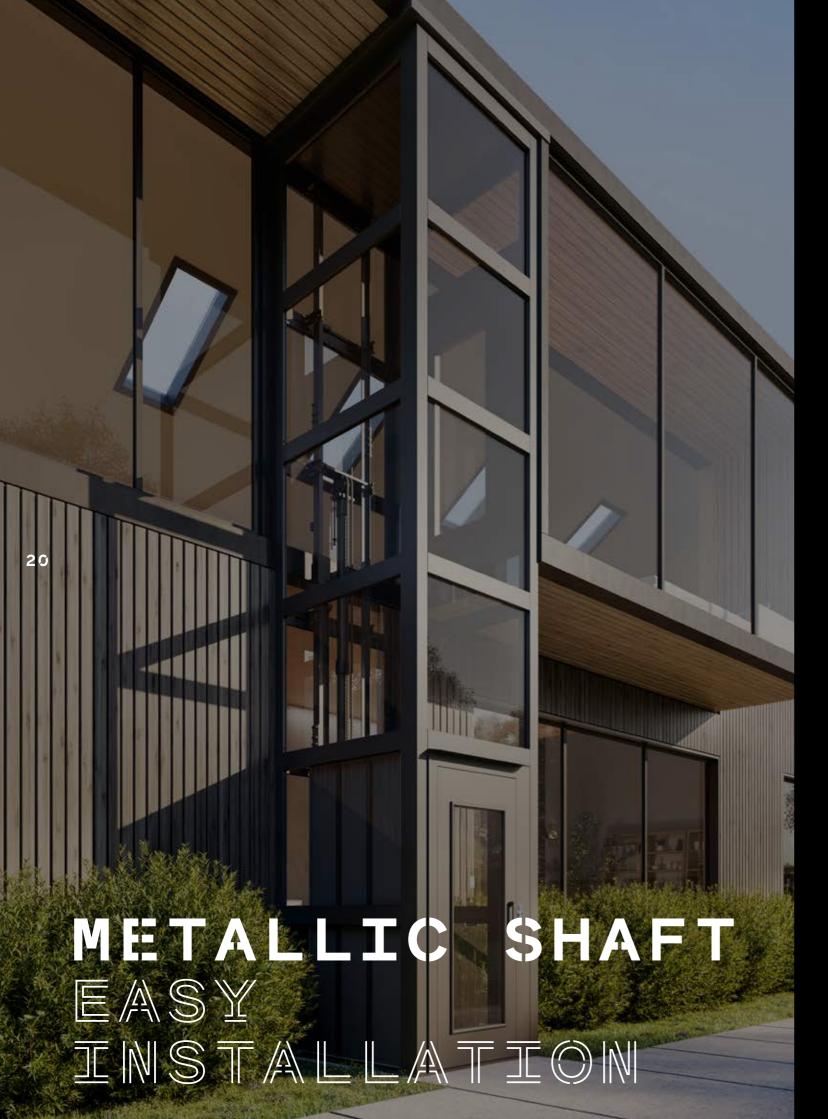

The metallic shaft has a snap-lock fastening system for quick and easy installation. It can be fitted with either plain steel panels painted in your choice of colour, or with glass panels from the selection below.

#### Glass Panels

The following options are available for the glass panels in the shaft and in the doors.

Cabin glass walls and half-height windows are always supplied in transparent glass.



Transparent



Smoky Grey



Opaque


Smoky Satin



Semi-Reflective

### Metallic Colours

In addition to the standard colour range, the following metallic colours are offered for the shaft structure, shaft panels and landing doors.



R06



R07



R09




R10



# TECHNICAL SPECIFICATION

LUXURY IM EVERY DETAIL

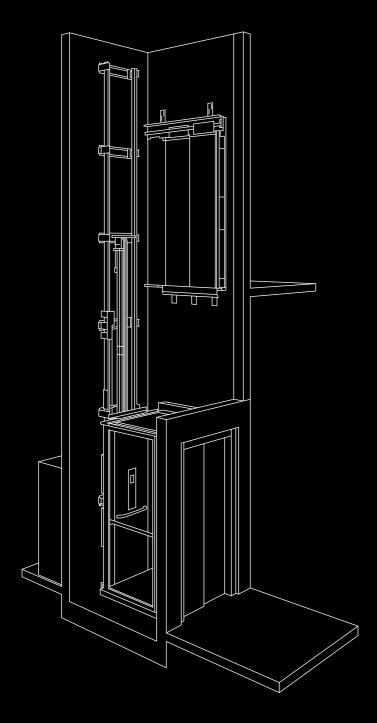

# AVAILABLE PLATFORM SIZES

Full details of technical specifications, exact dimensions and available plan layouts can be found in the product catalogue.

### **SPECIFICATION**

Technical Compliance	Machinery Directive 2006/42/EC Reference standard: EN81-41
Drive System	Hydraulic control unit with indirect chain action
Rate Speed	Europe: max. 0.15 m/s (2006/42/EC).
Travel Height	Open cabin 900–15100 mm Enclosed cabin 900–13600 mm
Number of Stops	Max. 6 stops per lift
Doors	Max. 2 doors per floor/ 12 doors per lift
Type of Accesses	Frontal, lateral, opposite or adjacent
Pit	120mm. If a pit is not possible, the lift can be used with a ramp.
Shaft Type	Metallic structural shaft or masonry shaft.
Shaft Top Height	Open cabin: minimum 2100 mm depending on shaft type and doors. See catalogue.
	Enclosed cabin with folding doors: minimum 2240 mm
	Enclosed cabin with sliding doors: minimum 2450 mm
Controls	Open cabin: Hold-to-run Enclosed cabin: Automatic (one-touch) Automatic controls on landings.
Application	Indoor or outdoor
Emergency	Battery operated
Lowering	emergency lowering
Control Voltage	24V
Power Supply	1-phase 230V 50/60Hz
Maximum Power	3kW
Circuit	16A tripping curves C/
Breaker/ RCD	30mA class A or B
Rated Load	250–450kg depending on cabin size.

